Light & Essence

COB STRIP SERIES

CREDO-COB360-B

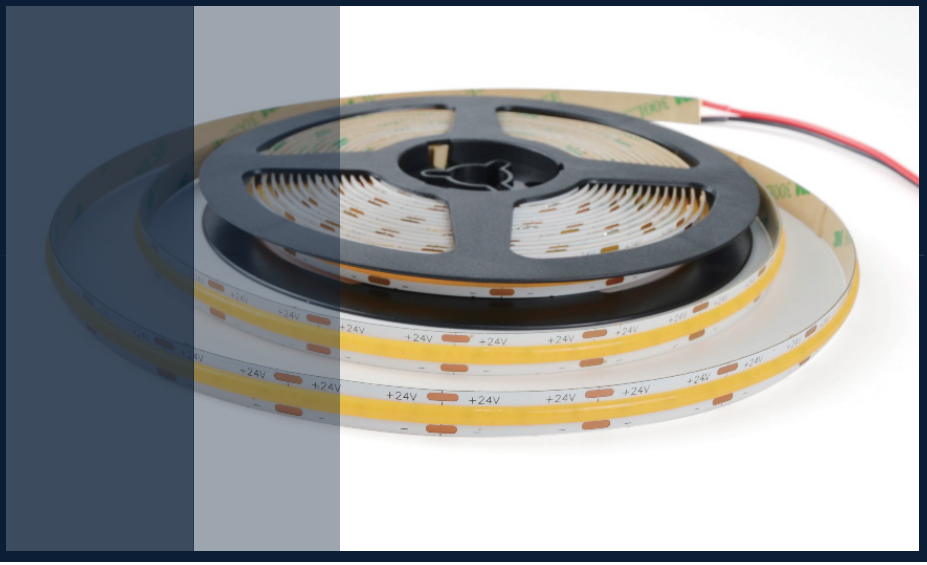

FIXTURE SPECIFICATIONS

Type	COB Strip	Power	14 W/m
Dimension	W 10 mm * H 1.8 mm	Beam Angle	120°
Cut length available	50 mm	Color Temperature	3000K / 4000K / 6500K
LED chips	360 LEDs	Color Rendering	CRI90
Max length	5000 mm/set	Rated Lumen Output	1330 - 1680 lm/m
Lifetime	50,000 hours @25°	Bin/Step	3-step MacAdam ellipse
Operating temp	Ta =-25 to 45	Bending	Top
Accessories	3M Tape	Supply voltage	DC24V
Mounting	Surface Mount / Aluminium Profile	Wire out	Dual-ended wiring
IP Rating	IP20		

COB
COB
FLICKER FREE

90
HIGH CRI
CRI 90

120°
WIDE BEAM
120°

IP20
INDOOR
IP20

50K
LONG LIFE
50,000 HRS

DIMENSIONS

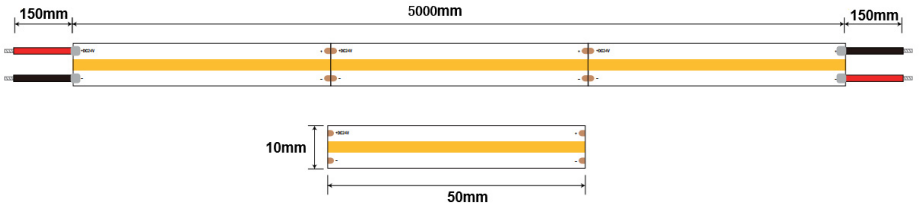

ACCESSORIES (ALUMINIUM PROFILE)

Alu. Profile 1408

Alu. Profile 1616

Alu. Profile 2507

Alu. Profile 1715

Alu. Profile 2515

Alu. Profile 2020

Light & Essence

COB STRIP SERIES

CREDO-COB480-B

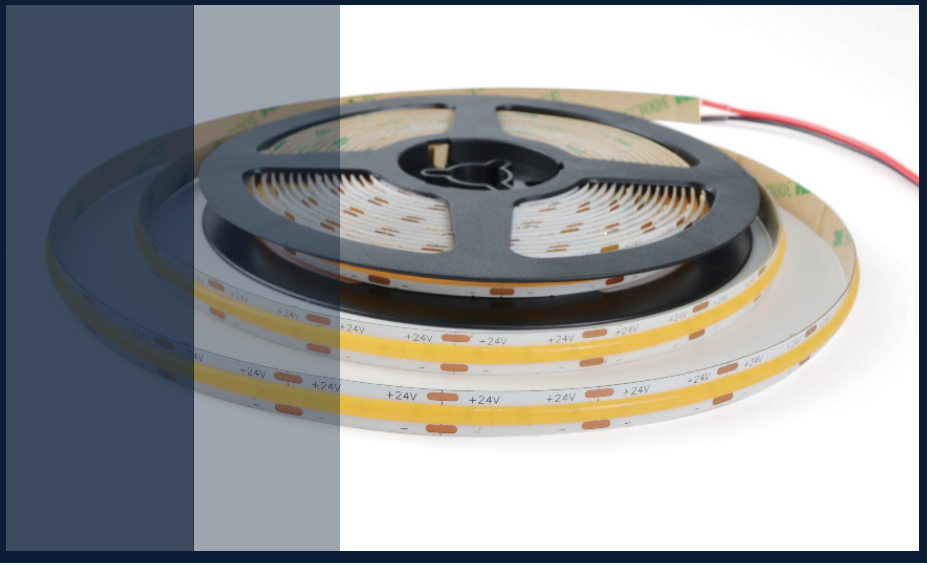

FIXTURE SPECIFICATIONS

Type	COB Strip	Power	16 W/m
Dimension	W 10 mm * H 1.8 mm	Beam Angle	120°
Cut length available	50 mm	Color Temperature	3000K / 4000K /6500K
LED chips	480 LEDs	Color Rendering	CRI90
Max length	5000 mm/set	Rated Lumen Output	1520 lm/m
Lifetime	50000 hours@25°	Bin/Step	3-step MacAdam ellipse
Operating temp	Ta =-25 to 45(Tc max=45)	Bending	Top
Accessories	Tape	Supply voltage	DC24V
Mounting	Concealed in slot	Wire out	Dual-ended wiring
IP Rating	IP20		

COB — COB FLICKER FREE

90 — HIGH CRI CRI 90

120° — WIDE BEAM 120°

IP20 — INDOOR IP20

50K — LONG LIFE 50,000 HRS

PHOTOMETRIC DATA

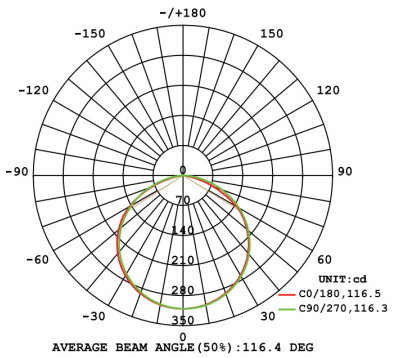

DIMENSIONS

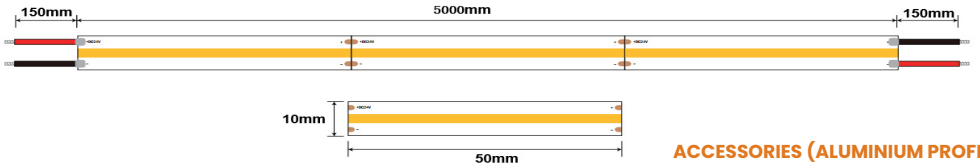

ACCESSORIES (ALUMINIUM PROFILE)

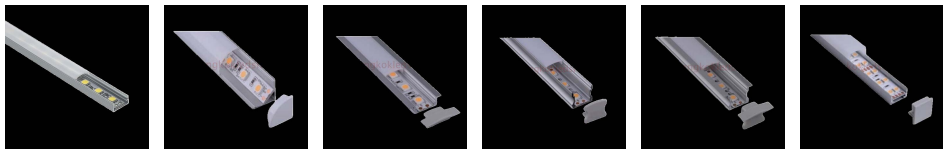

Alu. Profile 1408 | Alu. Profile 1616 | Alu. Profile 2507 | Alu. Profile 1715 | Alu. Profile 2515 | Alu. Profile 2020